

ELECTRIC STRIKE

014

014

APPLICATION

For use in new or replacement installations in metal jambs. Use with locksets having up to 5/8" throw.*

FEATURES

- FACE PLATE – 1-1/8" X 2-3/4"
- MINIATURIZED DESIGN – Smallest Electric Strike Available - Tucks into Hollow Metal Jambs and Partitions.
- SCRATCH AND CORROSION RESISTANT FACE PLATE
- DIE CAST CASE
- SOLID CAST LATCH – Chrome Plated
Cavity Depth - 1/2"; Width - 5/8";
Height - 1-1/8"
- NON-HANDED
- HEAVY DUTY LATCH SPRING
- MORTISE TYPE – Backset 1-5/16" Deep
- FAIL SECURE – (Standard Action) Unlocks When Energized

STANDARDS

- ANSI Type– 1-1/8" x 2-3/4" Fits Cutout Specification A115.1 (with slight jamb modification)
- BHMA 156.5 – 1992

FINISH (Specify When Ordering)

- BRASS – Powder Coated (014)
- SATIN CHROME – US26D (014C)

ELECTRICAL CHARACTERISTICS**

Four Magnetic Coils Available
Color coded wires depict the voltage of each coil.

- 8-16 VAC/4-6 VDC (Standard Voltage):
2 Black Wire Leads
- 12 VDC: 1 Red Wire Lead, 1 White Wire Lead
- 24 VAC: 2 Red Wire Leads
- 24 VDC: 1 Black Wire Lead, 1 White Wire Lead

FAIL SECURE NORMALLY LOCKED (Unlocked when energized)

VOLTAGE AMPS	CURRENT	OHMS	SOUND	DUTY
10-16 VAC	1.5-2.7	4.3	Buzz	Intrm.
12 DC	.184	65.0	Silent	Intrm.
24 AC	.895	14.0	Buzz	Intrm.
24 DC	.100	240.0	Silent	Intrm./Cont.


*5/8" Throw based on 1/8" door gap.

**Specify voltage when ordering

COMPATIBLE LOCKSETS

ACCURATE	62,67,76
ADAMSRITE	4700-8300, 8400
ARROW	C, H, M
BEST	5, 7, 50, 6TDL
CORBIN	1400-5600, 6100-6600
DEXTER	DEXLOCK, DURALOCK
DOMINION	300, 400, 5000
GUARD	1990
FALCON	A, BA, D, E, F, N, S
HARLOC	6900
KWKSET	400-500, 582, 583
LOCKWOOD	900
LORI	80/8200, 81/8300,
LSDA	1000-1500, 100-150
MARKS	110
NATIONAL	400
PDQ	SR, SV, SX
PARKER	160A
RUSSWIN	3400-4300
SARGENT	6, 7, 8, 9, 10
SCHLAGE	A, F
TACO	ED, HV, LXV, SV
TAYMOR	28
WEISER	A, BA, D, E
WESLOCK	ALL LOCKS
YALE	5200, 5300

NOTE: Compatible lockset designations are offered as a convenience only; reference should be made to manufacturers catalogs for complete data as to exact requirements. Caution must be taken in the alignment of locks with latchbolts when used with an electric strike. The spacing between the door and door jamb varies. If the gap is exceptionally tight, the latchbolt may not project to its maximum length. Trine Products Company, assumes no liability for differences between items compared.

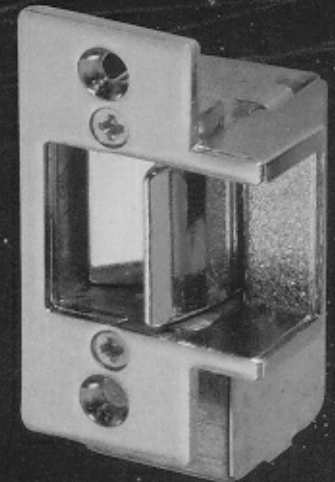

ACCESS CARDS • ACCESS CONTROL SYSTEMS • CREDIT CARDS
EMBOSSING • I.D. BADGES • MEMBERSHIP CARDS

